

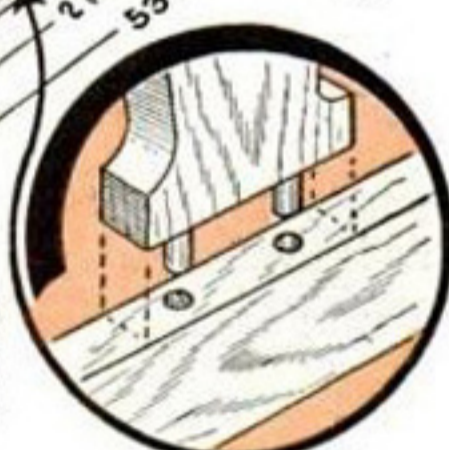
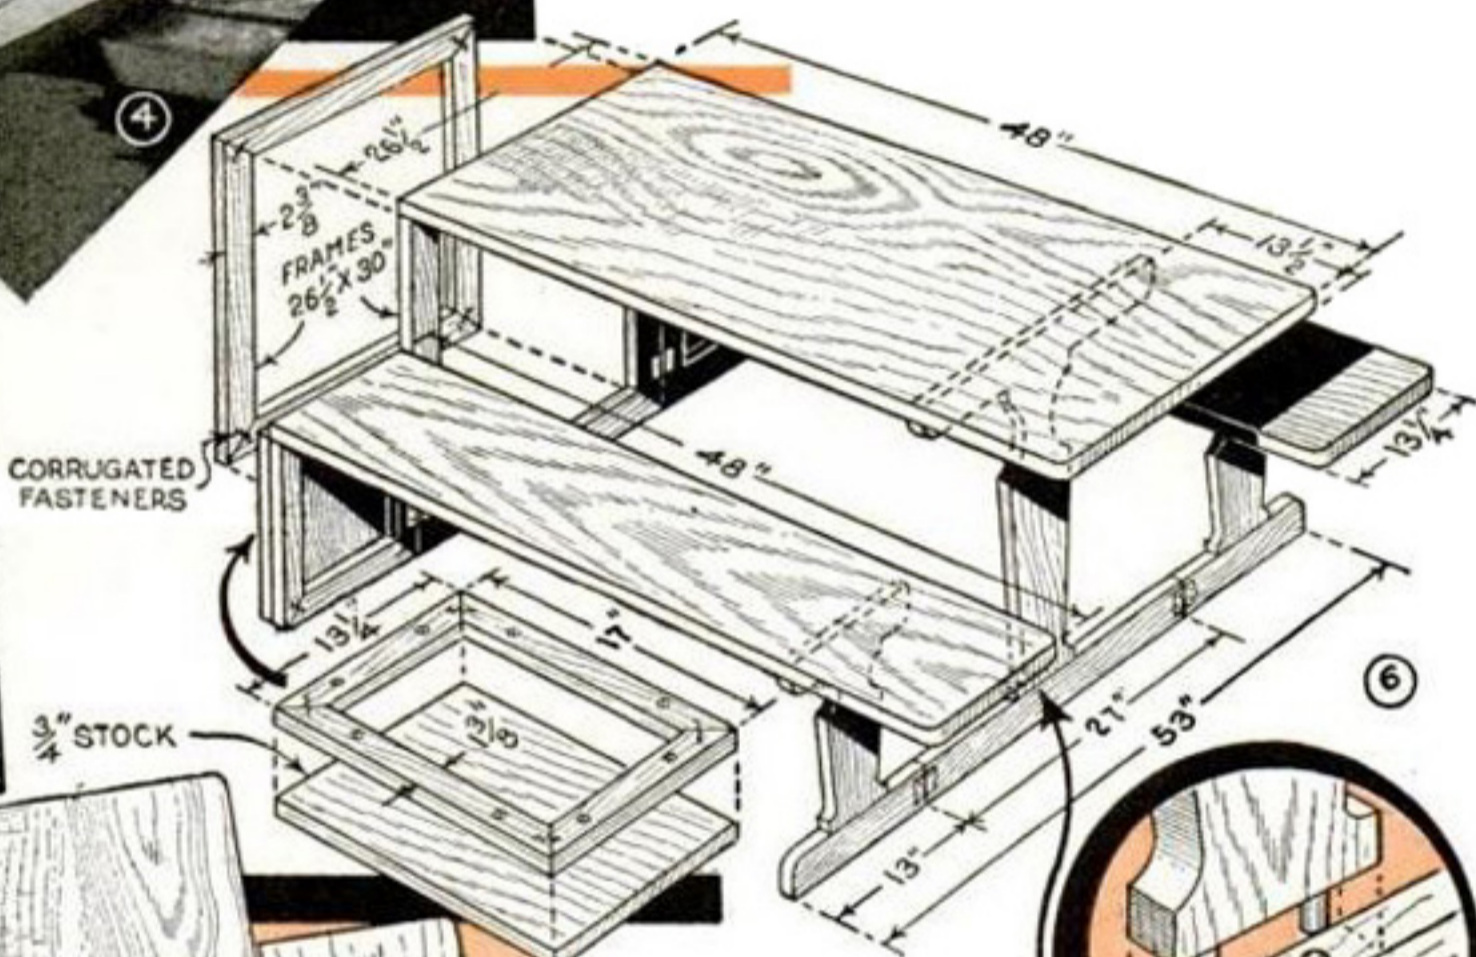


To fasten the nook to the wall, screws are driven through the lower edge of the center frame and into the baseboard. At the top, a filler strip must be inserted to bring the frame plumb with the wall, after which screws are driven through this to meet wall studs. No catches are needed to keep the assembly folded. In painting, it is best to remove all the hinges. Round the outer corners of the table and the seats, and sand the surfaces smooth. Apply a thin priming coat to the wood, followed, in order, with two of enamel. If desired, the nook can be made less noticeable against the wall if the wood is painted to match. Or, it can be finished to contrast pleasingly with the woodwork.

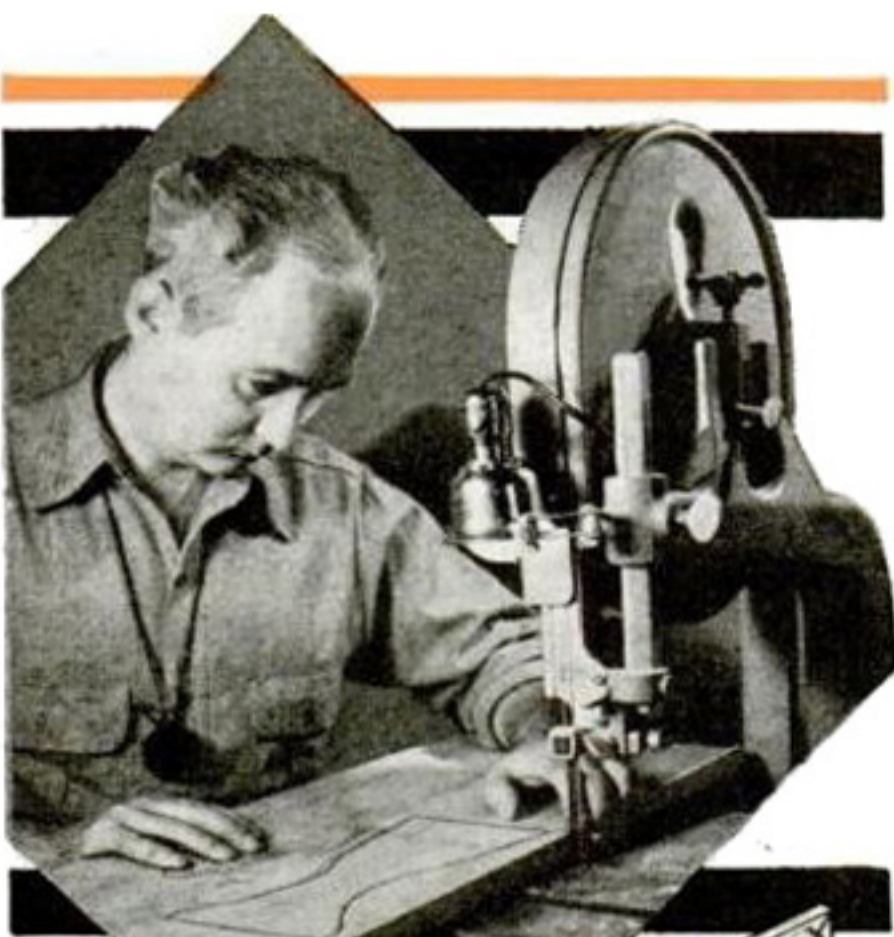

Use  $\frac{3}{4}$ -in. plywood for seats and table, solid stock for the rest, and paint to harmonize with the kitchen

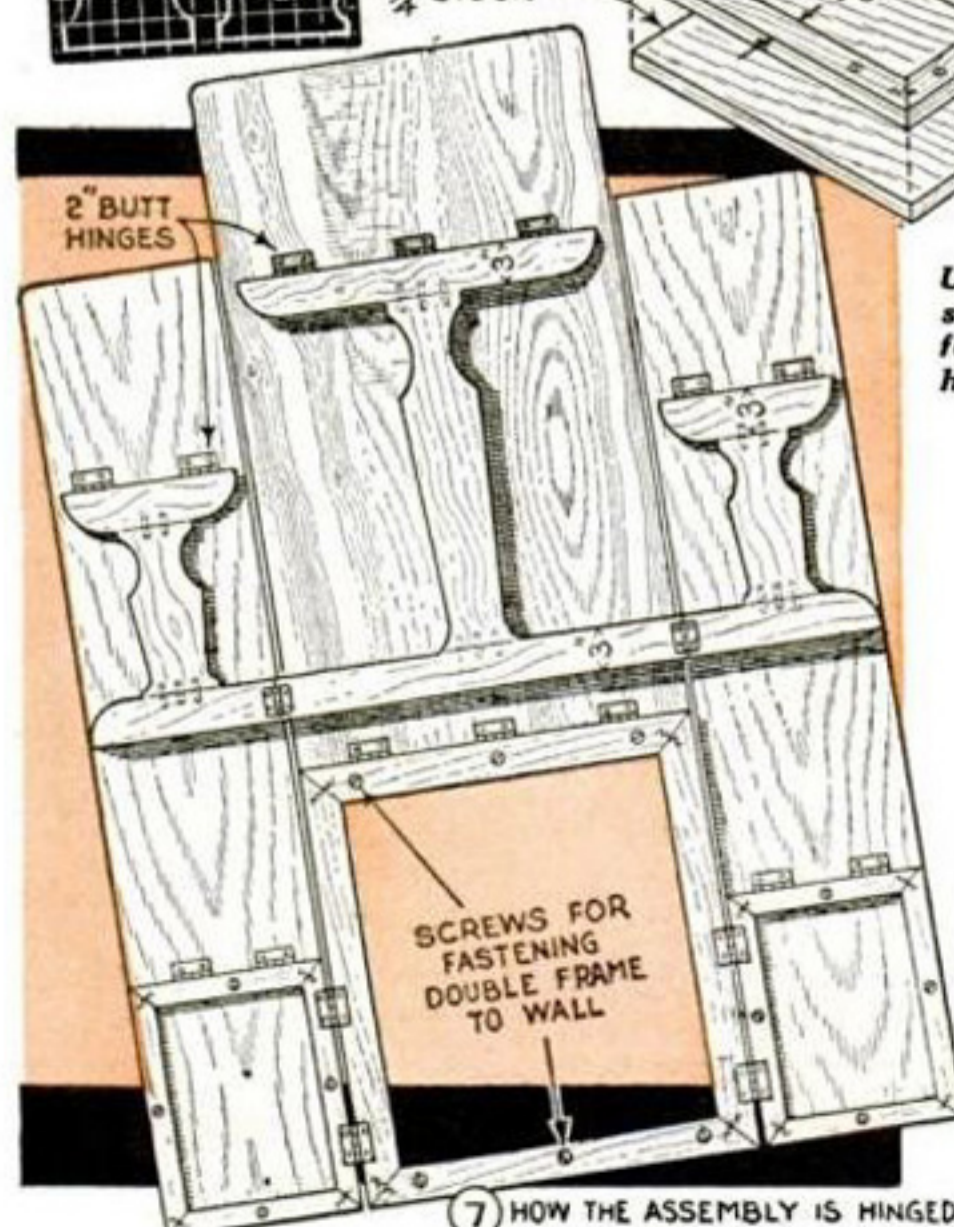

7 HOW THE ASSEMBLY IS HINGED

## Quick Way to Wash a Kitchen

When wiping down soiled kitchen walls which had been painted, one woman found that she could do the job quickly without cleanser and hard rubbing. All doors, windows and ventilators were closed tightly, after which a kettle of water was boiled vigorously on the stove. The oven was then heated and the door allowed to stand open. After half an hour of this steaming process, walls, ceiling and woodwork were wiped down, using plenty of soft, dry cloths. For best results, it was found advisable to work rapidly.